


# Low Noise Variable Gain Low Frequency Voltage Amplifier

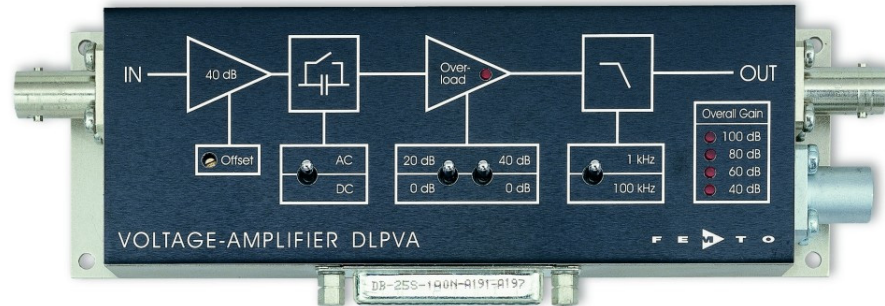


Features

- **Variable Gain 40 to 100 dB, Switchable in 20 dB Steps**
- **Bipolar Input Stage, Recommended for Low Impedance Sources Smaller than 100 Ω**
- **Very Low Input Voltage Noise: 700 pV/√Hz**
- **DC-Coupled, Single Ended**
- **0.5 μV/°C DC-Drift**
- **Bandwidth DC - 100 kHz, Switchable to 1 kHz**
- **Switchable AC/DC-Coupling**
- **Local and Remote Control**

Applications

- **Low-Noise Laboratory Amplifier**
- **Pulsed Thermal EMF Analysis**
- **Industrial Sensors**
- **Detector Preamplifier**
- **Integrated Measurement Systems**

Block Diagram

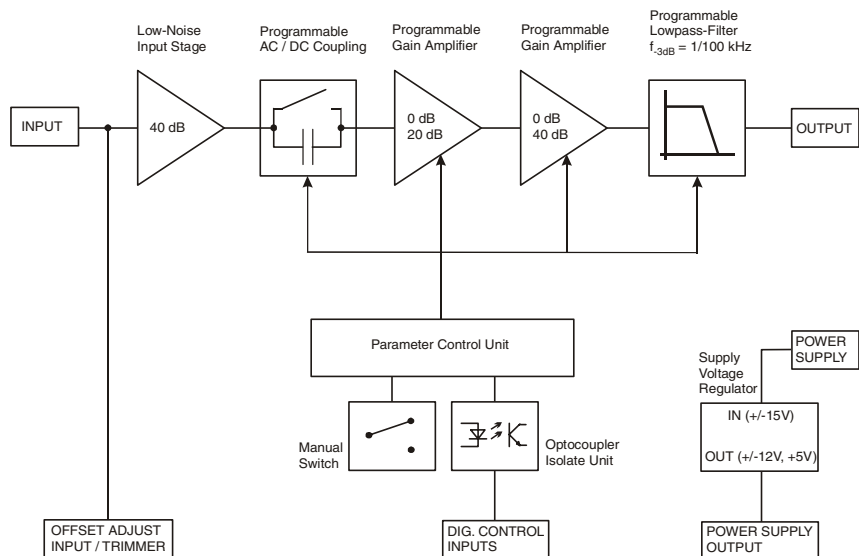


BS01-0440-19

## Low Noise Variable Gain Low Frequency Voltage Amplifier

Specifications	<i>Test Conditions</i>	<i>V<sub>s</sub> = ± 15 V, T<sub>a</sub> = 25°C</i>	
Gain	Gain Values	40, 60, 80, 100 dB indicated by four LEDs	
	Gain Accuracy	± 0.1 % (between settings) ± 1 % (overall)	
	Gain Flatness	± 0.1 dB	
Frequency Response	Lower Cut-Off Frequency	DC, switchable to 1.5 Hz	
	Upper Cut-Off Frequency	100 kHz, switchable to 1 kHz	
	Upper Cut-Off Frequency Rolloff	12 dB/Oct.	
Time Response	Rise / Fall Time (10% - 90%)	3.5 μs (@ BW = 100 kHz) 350 μs (@ BW = 1 kHz)	
Input	Input Impedance	1 MΩ	
	Input Voltage Drift	0.5 μV/°C	
	Equivalent Input Voltage Noise	<u>Gain Setting</u>	<u>Noise</u>
		100 dB	700 pV/√Hz
		80 dB	730 pV/√Hz
		60 dB	860 pV/√Hz
	40 dB	6 nV/√Hz	
	Equivalent Input Current Noise	3 pA/√Hz	
	1/f-Noise Corner	80 Hz	
	Input Bias Current	1 μA	
Input Bias Current Drift	8 nA/°C		
Input Offset Voltage	± 500 μV, adjustable by offset trimmer and external control voltage		
Output	Output Impedance	50 Ω (terminate with > 10 kΩ for best performance)	
	Output Voltage Range For Linear Amplification	± 10 V (@ > 10 kΩ load)	
	Output Current (max.)	± 20 mA	
	Output Overload Recovery Time	0.5 ms (after 20x overload)	
Overload LED	<p>The amplifier features a LED to signalize an overload condition. The Overload LED will turn on if the signal level within the signal path exceeds the linear operating range. In order to ensure the correct operation of the amplifier without signal distortions reduce the gain setting until the Overload LED turns off.</p> <p>The Overload LED may also turn on when the amplifier is operated with open input or with a high source impedance. For proper operation please use a source impedance of less than 1 kΩ or switch to a lower gain setting.</p>		
Remote Offset Control	Offset Control Voltage Range	± 10 V, corresponds to ± 500 μV input offset	
	Offset Control Input Impedance	200 kΩ	
Remote Digital Control	Control Input Voltage Range	Low: - 0.8 ... + 0.8 V High: + 1.8 ... + 12 V, TTL / CMOS compatible	
	Control Input Current	0 mA @ 0 V, 1.5 mA @ + 5 V, 4.5 mA @ + 12 V	
	Overload Output	Non active: + 5 V, max. 1 mA, active: 0.8 V, max. -10 mA	

## Low Noise Variable Gain Low Frequency Voltage Amplifier

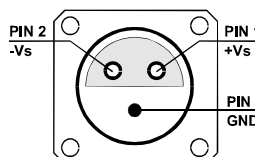
Power Supply	Supply Voltage	± 15 V (± 14.5 V to ± 16 V)
	Supply Current	± 75 mA typ. (depends on operating conditions, recommended power supply capability minimum 200 mA)
Case	Weight	0.32 kg (0.7 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	- 40 °C to + 100 °C
	Operating Temperature	0 °C to + 60 °C
Absolute Maximum Ratings	Power Supply Voltage	± 21 V
	Control Input Voltage	+ 16 V / - 5 V
	Signal Input Voltage	± 4.5 V
<b>Overvoltage at the signal input can severely degrade the noise performance or destroy the amplifier!</b>		
Connectors	Input	BNC
	Output	BNC
	Power Supply	LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND
		
	Control Port	Sub-D 25-pin, female, qual. class 2 Pin 1: +12 V (stabilized power supply output, max. 100 mA) Pin 2: -12 V (stabilized power supply output, max. 100 mA) Pin 3: AGND (analog ground) Pin 4: +5 V (stabilized power supply output, max. 50 mA) Pin 5: digital output: overload Pin 6: NC Pin 7: NC Pin 8: offset control voltage input Pin 9: DGND (ground f. digital control Pin 10 - 25) Pin 10: NC Pin 11: digital control input: gain, LSB Pin 12: digital control input: gain, MSB Pin 13: digital control input: AC/DC Pin 14: digital control input: 100 kHz / 1 kHz Pin 15 - 25: NC

## Low Noise Variable Gain Low Frequency Voltage Amplifier

Remote Control Operation	<p><b>General</b></p> <p>Remote control input bits are opto-isolated and connected by logical OR to local switch setting. For remote control a switch setting, set the corresponding local switch to "0 dB", "AC" and "1 kHz" and select the wanted setting via a bit-code at the corresponding digital inputs. Mixed operation, e.g. local gain setting and remote controlled bandwidth setting, is also possible.</p>															
Gain Setting	<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="border-bottom: 1px solid black;">Gain</th> <th style="border-bottom: 1px solid black;">Pin 11</th> <th style="border-bottom: 1px solid black;">Pin 12</th> </tr> </thead> <tbody> <tr> <td>40 dB</td> <td>low</td> <td>low</td> </tr> <tr> <td>60 dB</td> <td>high</td> <td>low</td> </tr> <tr> <td>80 dB</td> <td>low</td> <td>high</td> </tr> <tr> <td>100 dB</td> <td>high</td> <td>high</td> </tr> </tbody> </table>	Gain	Pin 11	Pin 12	40 dB	low	low	60 dB	high	low	80 dB	low	high	100 dB	high	high
Gain	Pin 11	Pin 12														
40 dB	low	low														
60 dB	high	low														
80 dB	low	high														
100 dB	high	high														
AC/DC Setting	<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="border-bottom: 1px solid black;">Coupling</th> <th style="border-bottom: 1px solid black;">Pin 13</th> </tr> </thead> <tbody> <tr> <td>AC</td> <td>low</td> </tr> <tr> <td>DC</td> <td>high</td> </tr> </tbody> </table>	Coupling	Pin 13	AC	low	DC	high									
Coupling	Pin 13															
AC	low															
DC	high															
Bandwidth Setting	<table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="border-bottom: 1px solid black;">Bandwidth</th> <th style="border-bottom: 1px solid black;">Pin 14</th> </tr> </thead> <tbody> <tr> <td>1 kHz</td> <td>low</td> </tr> <tr> <td>100 kHz</td> <td>high</td> </tr> </tbody> </table>	Bandwidth	Pin 14	1 kHz	low	100 kHz	high									
Bandwidth	Pin 14															
1 kHz	low															
100 kHz	high															


Typical Performance Characteristics

**Frequency Response (Logarithmic)**

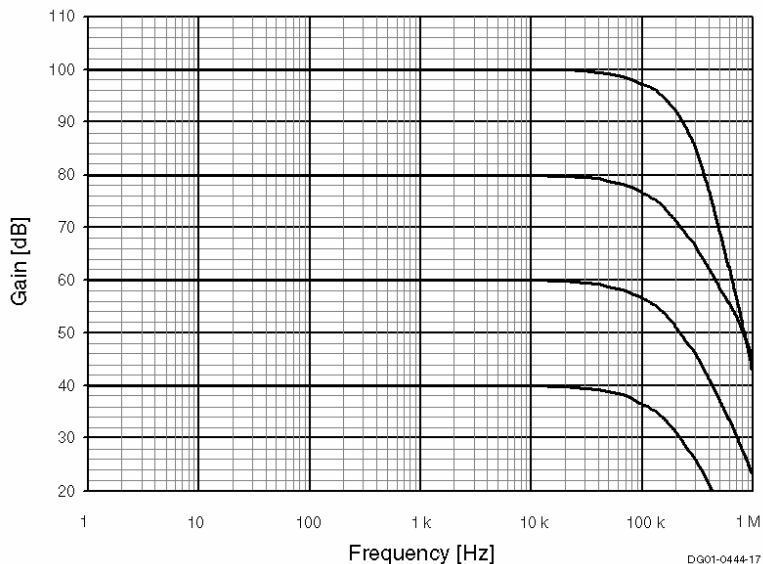

# Low Noise Variable Gain Low Frequency Voltage Amplifier

Dimensions

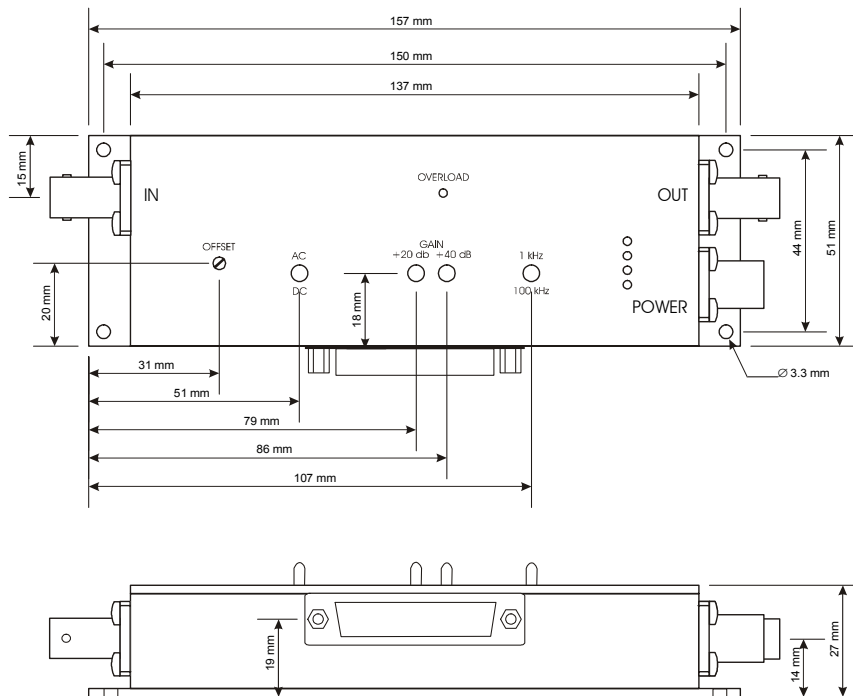

DZ01-0440-18

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 D-10179 Berlin · Germany  
 Tel.: +49-(0)30-280 4711-0  
 Fax: +49-(0)30-280 4711-11  
 e-mail: info@femto.de  
 http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH  
 Printed in Germany