


Ultra High Speed Photoreceiver with InGaAs Photodiode

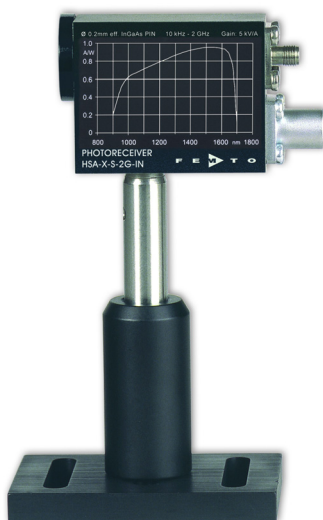


The picture shows the HSA-X-S-2G-IN-FS with free space input. The photoreceiver will be delivered without post holder and post.

Features	<ul style="list-style-type: none"> • Bandwidth 10 kHz ... 2 GHz • InGaAs Detector, Ø 0.2 mm Effective Active Diameter • Spectral Range 900 ... 1700 nm • Amplifier Transimpedance (Gain) 5×10^3 V/A • Max. Conversion Gain 4.8×10^3 V/W @ 1550 nm 																																																								
Applications	<ul style="list-style-type: none"> • Spectroscopy • Ultra Fast Pulse and Transient Measurements • Optical Triggering • Optical Front-End for Oscilloscopes and Ultra Fast A/D Converters 																																																								
Specifications	<p><i>Test Conditions</i> <i>V_s = + 15 V, T_a = 25°C, System Impedance = 50 Ω</i></p> <table border="0"> <tr> <td style="vertical-align: top;">Gain</td> <td>Amplifier Transimpedance</td> <td>5×10^3 V/A</td> <td>(@ 50 Ω load)</td> </tr> <tr> <td></td> <td>Conversion Gain</td> <td>4.8×10^3 V/W</td> <td>(@ 1550 nm)</td> </tr> <tr> <td style="vertical-align: top;">Frequency Response</td> <td>Lower Cut-Off Frequency</td> <td>10 kHz</td> <td></td> </tr> <tr> <td></td> <td>Upper Cut-Off Frequency (- 3 dB)</td> <td>2 GHz</td> <td>(± 10 %)</td> </tr> <tr> <td></td> <td>Rise/Fall Time (10% - 90%)</td> <td>180 ps</td> <td></td> </tr> <tr> <td></td> <td>Gain Flatness</td> <td>± 1 dB</td> <td></td> </tr> <tr> <td style="vertical-align: top;">Input / Detector</td> <td>Detector Material</td> <td colspan="2">InGaAs photodiode</td> </tr> <tr> <td></td> <td>Active Area</td> <td colspan="2">effective Ø 0.2 mm (actual Ø 0.1 mm plus ball lens)</td> </tr> <tr> <td></td> <td>Spectral Range</td> <td colspan="2">900 ... 1700 nm</td> </tr> <tr> <td></td> <td>Max. Optical Peak Input Power</td> <td>240 µW</td> <td>(for linear amplification, @ 1550 nm)</td> </tr> <tr> <td style="vertical-align: top;">Noise</td> <td>Min. NEP</td> <td>14 pW/√Hz</td> <td>(@ 1550 nm, 100 MHz)</td> </tr> <tr> <td style="vertical-align: top;">Output</td> <td>Output Impedance</td> <td>50 Ω</td> <td>(designed for 50 Ω load)</td> </tr> <tr> <td></td> <td>Max. Output Voltage</td> <td>1.9 Vpp</td> <td>(@ 50 Ω load, for linear amplification)</td> </tr> <tr> <td style="vertical-align: top;">Power Supply</td> <td>Supply Voltage</td> <td colspan="2">+ 15 V, 130 mA typ. (depends on operating conditions, recommended power supply capability minimum 200 mA)</td> </tr> </table>	Gain	Amplifier Transimpedance	5×10^3 V/A	(@ 50 Ω load)		Conversion Gain	4.8×10^3 V/W	(@ 1550 nm)	Frequency Response	Lower Cut-Off Frequency	10 kHz			Upper Cut-Off Frequency (- 3 dB)	2 GHz	(± 10 %)		Rise/Fall Time (10% - 90%)	180 ps			Gain Flatness	± 1 dB		Input / Detector	Detector Material	InGaAs photodiode			Active Area	effective Ø 0.2 mm (actual Ø 0.1 mm plus ball lens)			Spectral Range	900 ... 1700 nm			Max. Optical Peak Input Power	240 µW	(for linear amplification, @ 1550 nm)	Noise	Min. NEP	14 pW/√Hz	(@ 1550 nm, 100 MHz)	Output	Output Impedance	50 Ω	(designed for 50 Ω load)		Max. Output Voltage	1.9 Vpp	(@ 50 Ω load, for linear amplification)	Power Supply	Supply Voltage	+ 15 V, 130 mA typ. (depends on operating conditions, recommended power supply capability minimum 200 mA)	
Gain	Amplifier Transimpedance	5×10^3 V/A	(@ 50 Ω load)																																																						
	Conversion Gain	4.8×10^3 V/W	(@ 1550 nm)																																																						
Frequency Response	Lower Cut-Off Frequency	10 kHz																																																							
	Upper Cut-Off Frequency (- 3 dB)	2 GHz	(± 10 %)																																																						
	Rise/Fall Time (10% - 90%)	180 ps																																																							
	Gain Flatness	± 1 dB																																																							
Input / Detector	Detector Material	InGaAs photodiode																																																							
	Active Area	effective Ø 0.2 mm (actual Ø 0.1 mm plus ball lens)																																																							
	Spectral Range	900 ... 1700 nm																																																							
	Max. Optical Peak Input Power	240 µW	(for linear amplification, @ 1550 nm)																																																						
Noise	Min. NEP	14 pW/√Hz	(@ 1550 nm, 100 MHz)																																																						
Output	Output Impedance	50 Ω	(designed for 50 Ω load)																																																						
	Max. Output Voltage	1.9 Vpp	(@ 50 Ω load, for linear amplification)																																																						
Power Supply	Supply Voltage	+ 15 V, 130 mA typ. (depends on operating conditions, recommended power supply capability minimum 200 mA)																																																							

Ultra High Speed Photoreceiver with InGaAs Photodiode

Specifications (continued)	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 2px;">Case</td> <td style="padding: 2px;">Weight</td> <td style="padding: 2px;">100 g (0.23 lbs)</td> </tr> <tr> <td></td> <td style="padding: 2px;">Material</td> <td style="padding: 2px;">AlMg4.5Mn, nickel-plated</td> </tr> <tr> <td style="padding: 2px;">Temperature Range</td> <td style="padding: 2px;">Storage Temperature</td> <td style="padding: 2px;">- 40 ... + 100 °C</td> </tr> <tr> <td></td> <td style="padding: 2px;">Operating Temperature</td> <td style="padding: 2px;">0 ... + 60 °C</td> </tr> </table>	Case	Weight	100 g (0.23 lbs)		Material	AlMg4.5Mn, nickel-plated	Temperature Range	Storage Temperature	- 40 ... + 100 °C		Operating Temperature	0 ... + 60 °C
Case	Weight	100 g (0.23 lbs)											
	Material	AlMg4.5Mn, nickel-plated											
Temperature Range	Storage Temperature	- 40 ... + 100 °C											
	Operating Temperature	0 ... + 60 °C											
Absolute Maximum Ratings	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 2px;">Power Supply Voltage</td> <td style="padding: 2px;">± 22 V</td> </tr> <tr> <td style="padding: 2px;">Optical Input Power</td> <td style="padding: 2px;">10 mW (averaged)</td> </tr> </table>	Power Supply Voltage	± 22 V	Optical Input Power	10 mW (averaged)								
Power Supply Voltage	± 22 V												
Optical Input Power	10 mW (averaged)												

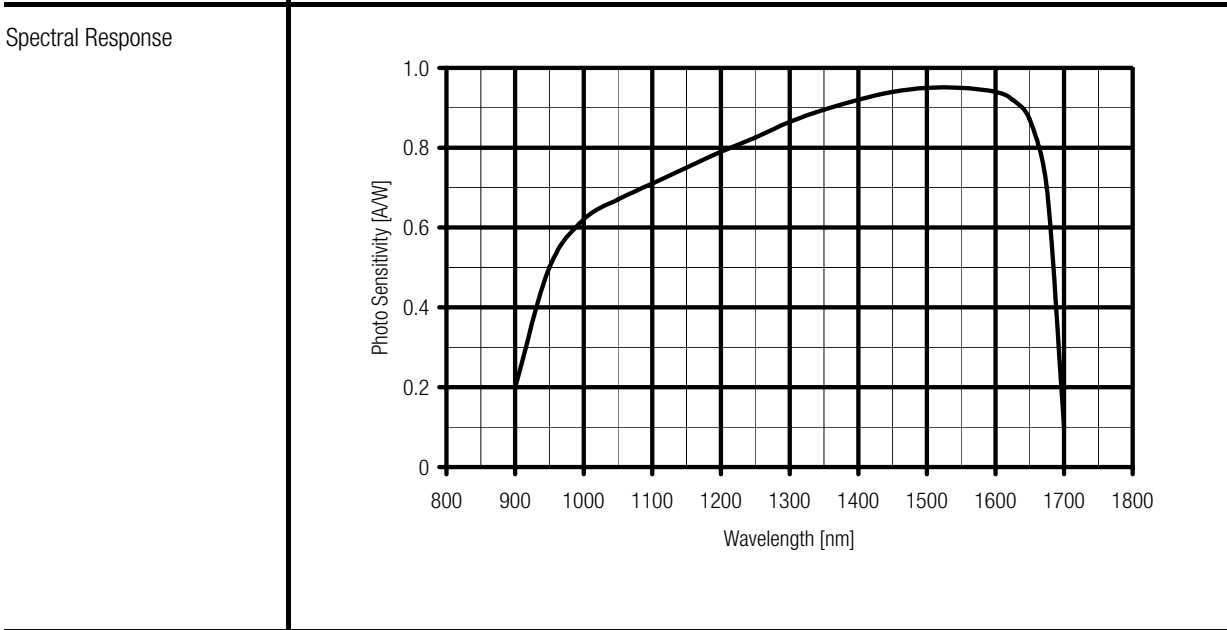


Connectors	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%; padding: 2px;">Input</td> <td style="padding: 2px;">HSA-X-S-2G-IN-FS</td> <td style="padding: 2px;">25 mm round flange for free space applications</td> </tr> <tr> <td></td> <td style="padding: 2px;">HSA-X-S-2G-IN-FC</td> <td style="padding: 2px;">FC fiber optic receptacle</td> </tr> <tr> <td style="padding: 2px;">Output</td> <td colspan="2" style="padding: 2px;">SMA</td> </tr> <tr> <td style="padding: 2px;">Power Supply</td> <td colspan="2" style="padding: 2px;">LEMO series 1S, 3-pin fixed socket</td> </tr> <tr> <td></td> <td style="padding: 2px;">Pin 1:</td> <td style="padding: 2px;">+ 15V</td> </tr> <tr> <td></td> <td style="padding: 2px;">Pin 2:</td> <td style="padding: 2px;">n.c.</td> </tr> <tr> <td></td> <td style="padding: 2px;">Pin 3:</td> <td style="padding: 2px;">GND</td> </tr> </table>	Input	HSA-X-S-2G-IN-FS	25 mm round flange for free space applications		HSA-X-S-2G-IN-FC	FC fiber optic receptacle	Output	SMA		Power Supply	LEMO series 1S, 3-pin fixed socket			Pin 1:	+ 15V		Pin 2:	n.c.		Pin 3:	GND
Input	HSA-X-S-2G-IN-FS	25 mm round flange for free space applications																				
	HSA-X-S-2G-IN-FC	FC fiber optic receptacle																				
Output	SMA																					
Power Supply	LEMO series 1S, 3-pin fixed socket																					
	Pin 1:	+ 15V																				
	Pin 2:	n.c.																				
	Pin 3:	GND																				

Available Models	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 2px;">HSA-X-S-2G-IN-FS</td> <td style="padding: 2px;">free space input</td> </tr> <tr> <td style="padding: 2px;">HSA-X-S-2G-IN-FC</td> <td style="padding: 2px;">FC fiber optic receptacle</td> </tr> <tr> <td style="padding: 2px;">HSA-X-S</td> <td style="padding: 2px;">customized versions available on request</td> </tr> </table>	HSA-X-S-2G-IN-FS	free space input	HSA-X-S-2G-IN-FC	FC fiber optic receptacle	HSA-X-S	customized versions available on request
HSA-X-S-2G-IN-FS	free space input						
HSA-X-S-2G-IN-FC	FC fiber optic receptacle						
HSA-X-S	customized versions available on request						

Ultra High Speed Photoreceiver
with InGaAs Photodiode

Dimensions

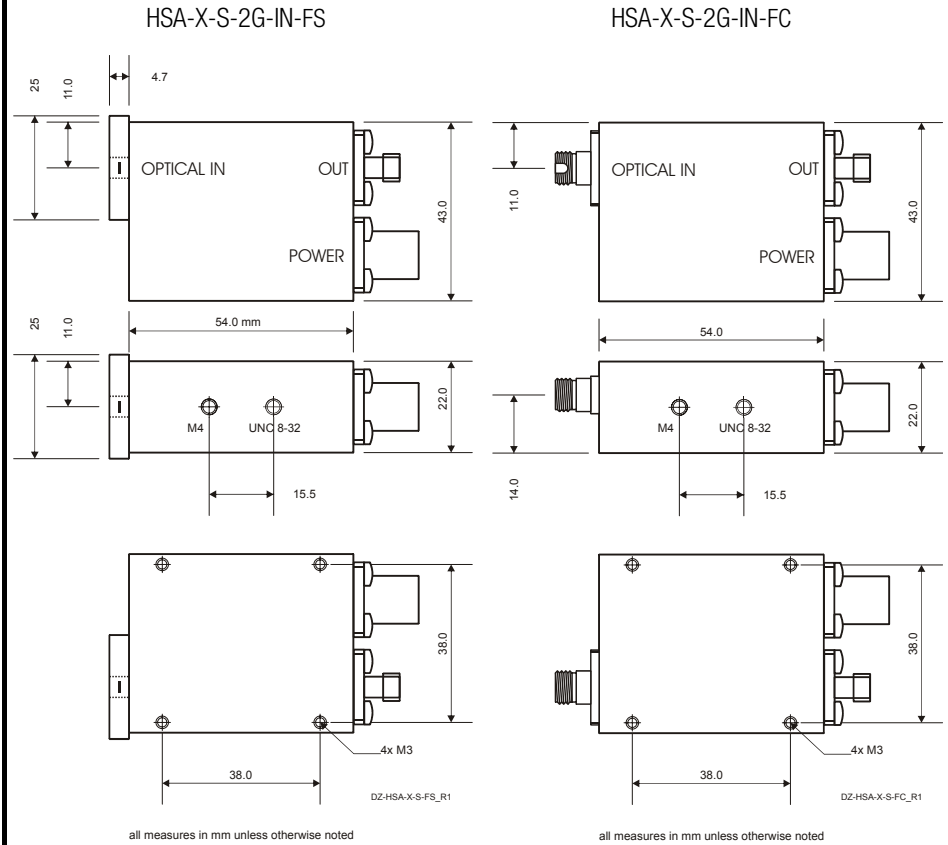

FEMTO Messtechnik GmbH
Klosterstr. 64
D-10179 Berlin · Germany
Tel.: +49-(0)30-280 4711-0
Fax: +49-(0)30-280 4711-11
E-Mail: info@femto.de
http://www.femto.de

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
© by FEMTO Messtechnik GmbH
Printed in Germany